




## Blowby Meter / Instrumentation

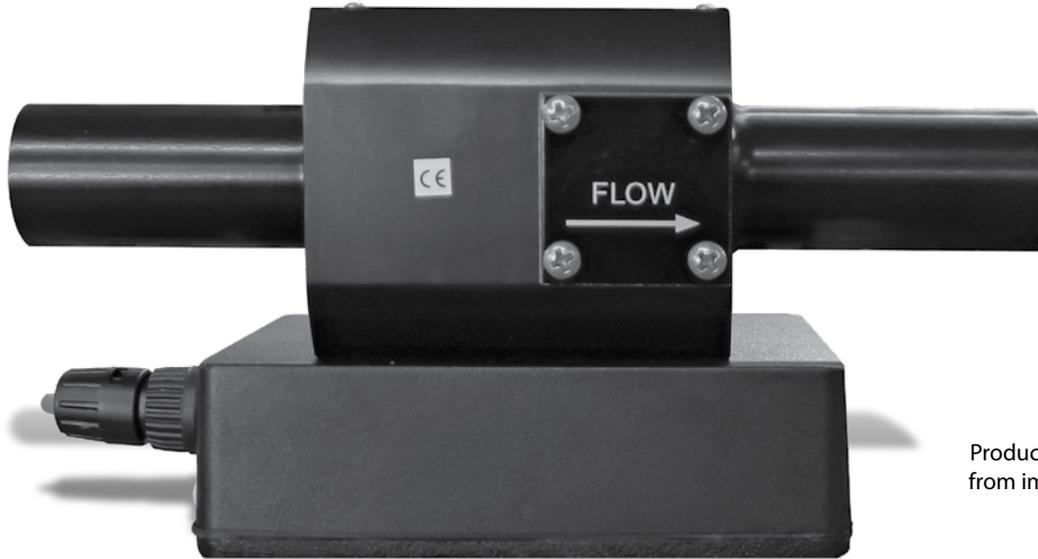

Product may differ from image shown

The Taylor Blowby Meter provides all the advantages of vortex shredding technology in an anodized aluminum construction design that is perfect for rugged applications with minimal space requirements. These inline blowby meters offer the best value for your low pressure flow applications.

### Specifications

Measured:	Air or low pressure gas
Operating temperature:	0 to 200°F (-18 to 93°C)
Accuracy:	+/- 2% full scale (1% of reading with Flow Computer)
Repeatability:	+/- 0.5% of reading
Input power:	+12 to +24 VDC @ 35 mA
Outputs:	0 to 5 VDC, 0 to 3 VDC or Frequency
Pressure loss:	As low as 0.1 in. (2.54 mm) water column; pressure loss varies with flow rate
Response Time Analog/Frequency:	300 ms analog, 10 ms frequency
Connector:	5 pin

### Flow Rates

Line size in. (mm)	3/4 (19)	1 (25.4)	2 (50.8)
ACFM range	0.7 - 27	1 - 50	5 - 200
m <sup>3</sup> /hr range	1.1 - 43	1.6 - 80	8 - 339

*Everything you need to succeed*

