


# Servo Inlet Manifold

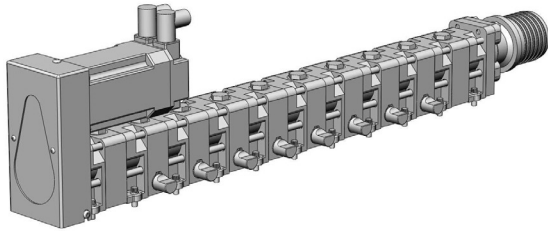

73175.10 Servo-Controlled Inlet Manifold Shown


## Overview

The Power Test Servo Inlet Manifold is used in place of a manual inlet valve and uses an electric servo motor to provide the fastest, most precise method of water control during engine testing.

The Servo Inlet Manifold features:

- High Speed Electric Servo Motor
- Heavy duty brass inlet valves
- Stainless steel, spool-style shutoff valves that enhance reliability and minimize chance of fouling
- Manual control of individual inlet ports for increased resolution when testing smaller engines

When used with a dynamometer control system such as PowerNet, the servo motor and control loop allows automated engine testing.

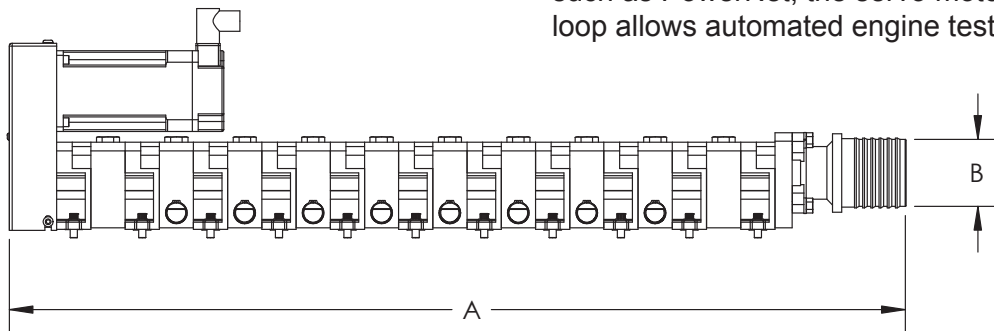

Description	Part #	Dimensions - inches (mm)		Compatibility				Weight lbs (kg)
		A	B	50X	PTX	35X	45X	
2" Servo Inlet Manifold	73123.01	11 7/8 (302)	2 (51)	X	X	X		47 (22)
2" Servo Inlet Manifold	73123.02	14 7/8 (378)	2 (51)	X	X	X		53 (24)
2" Servo Inlet Manifold	73123.03	17 3/4 (451)	2 (51)			X		60 (28)
2" Servo Inlet Manifold	73123.04	20 3/4 (527)	2 (51)			X		66 (30)
2" Servo Inlet Manifold	73123.05	23 3/4 (604)	2 (51)			X		72 (33)
2" Servo Inlet Manifold	73123.06	26 3/4 (680)	2 (51)			X		79 (36)
3" Servo Inlet Manifold	73175.06	27 3/8 (696)	3 (76)				X	63 (29)
3" Servo Inlet Manifold	73175.07	30 3/8 (772)	3 (76)				X	73 (34)
3" Servo Inlet Manifold	73175.08	33 3/8 (848)	3 (76)				X	76 (35)
3" Servo Inlet Manifold	73175.09	36 3/8 (924)	3 (76)				X	82 (38)
3" Servo Inlet Manifold	73175.10	39 1/4 (997)	3 (76)				X	89 (41)



N60 W22700 Silver Spring Drive • Sussex, WI 53089 USA  
 phone: (262) 252-4301 • fax: (262) 246-0436  
[www.pwrst.com](http://www.pwrst.com)